




AMPLITUDE[®]

SCORE[®]
REVISION SYSTEM
revision total knee
replacement

SCORE® REVISION SYSTEM



- Anatomical femoral condyle: trochlea and stem oriented at an angle of 6°
- Anterior cut angle of 6° to protect the anterior cortex
- Stability guaranteed by the intercondylar cage, tolerating varus/valgus of 2°
- Homothetic evolution of the cage, maintaining bone mass.



- Single centre of rotation, from extension to 90° flexion
- Implant thickness: 10 mm
- 4 femoral sizes
- Condyle to be cemented

SCORE® REVISION SYSTEM



- Constrained revision total knee replacement, with a mobile bearing.
- Frontal and sagittal joint stability guaranteed by:
 - total congruence from 0° to 65° flexion
 - An intercondylar cage and cam
- Bone anchoring ensured by:
 - Tibial and femoral diaphyseal extension stem, with an option of offsetting from the knee center
 - Tibial and/or femoral wedges

SCORE® REVISION SYSTEM



- Congruent insert in the femoral condyle from hyper-extension to 65° flexion.
- Intercondylar cam incorporating a metal reinforcement.
- Conical and cylindrical mount eliminating decoaptation of the base.
- Flaring of the insert to enable mixing of sizes.
- Anterior cut-out to protect the patellar tendon.
- Material: machined UHMWPE




- Anatomical posterior cut of the base.
- Mirror-polished joint surface.
- Delta wing and conical shape of the tibial base.
- 7 tibial sizes
- Tibial base to be cemented

SCORE® REVISION SYSTEM



- Offset connector allowing lateralization in space between the diaphyseal axis and the center of the knee.
- Adaptable to femoral and tibial implant.
- Fixation by Morse cone and screwing.
- Offset: 2, 4 and 6 mm.

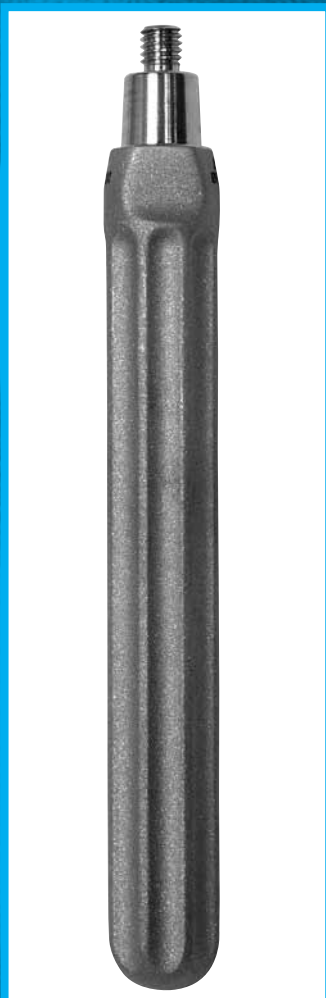

- Tibial and/or femoral extension stem.
- Use with or without an off-center connector.
- Anti-rotation grooves.
- Diameters: 10, 12, 14, 16, 18 and 20 mm.
- Lengths: 75, 100, 150 and 200 mm.



- Posterior and distal femoral wedge to be screwed.
- Thicknesses: 4 and 8 mm.
- Can be mixed.



- Tibial half-wedge to be cemented: enabling adjustment of the cortical cover.
- Thicknesses: 5, 10 and 15 mm.



- Resurfacing patella Ø30, 33 and 36 mm.
- Dome-shaped patella.
- To be cemented

SCORE® REVISION SYSTEM: implants

CE 2797

Référence : FT.GB.019/1.0

SCORE® revision femoral component – Cemented – Size A RIGHT	1-02003DA	Tibial half-block for Total Knee Prosthesis - Size 1/2 Thickness 5mm	1-0201211
SCORE® revision femoral component – Cemented – Size B RIGHT	1-02003DB	Tibial half-block for Total Knee Prosthesis - Size 3/4/5 Thickness 5mm	1-0201213
SCORE® revision femoral component – Cemented – Size C RIGHT	1-02003DC	Tibial half-block for Total Knee Prosthesis - Size 6/7 Thickness 5mm	1-0201216
SCORE® revision femoral component – Cemented – Size D RIGHT	1-02003DD	Tibial half-block for Total Knee Prosthesis - Size 1/2 Thickness 10 RM/LL	1-0201221
SCORE® revision femoral component – Cemented – Size A LEFT	1-02003GA	Tibial half-block for Total Knee Prosthesis - Size 1/2 Thickness 15mm RM/LL	1-0201231
SCORE® revision femoral component – Cemented – Size B LEFT	1-02003GB	Tibial half-block for Total Knee Prosthesis - Size 3/4/5 Thickness 10mm RM/LL	1-0201223
SCORE® revision femoral component – Cemented – Size C LEFT	1-02003GC	Tibial half-block for Total Knee Prosthesis - Size 3/4/5 Thickness 15mm RM/LL	1-0201233
SCORE® revision femoral component – Cemented – Size D LEFT	1-02003GD	Tibial half-block for Total Knee Prosthesis - Size 6/7 Thickness 10mm RM/LL	1-0201226
		Tibial half-block for Total Knee Prosthesis - Size 6/7 Thickness 15mm RM/LL	1-0201236
		Tibial half-block for Total Knee Prosthesis - Size 1/2 Thickness 10mm LR/LM	1-0201241
Distal femoral block for Total Knee Prosthesis – Size A thickness 4 mm	1-020104A	Tibial half-block for Total Knee Prosthesis - Size 1/2 Thickness 15mm LR/LM	1-0201251
Distal femoral block for Total Knee Prosthesis – Size A thickness 8 mm	1-020108A	Tibial half-block for Total Knee Prosthesis - Size 3/4/5 Thickness 10mm LR/LM	1-0201243
Distal femoral block for Total Knee Prosthesis – Size B thickness 4 mm	1-020104B	Tibial half-block for Total Knee Prosthesis - Size 3/4/5 Thickness 15mm LR/LM	1-0201253
Distal femoral block for Total Knee Prosthesis – Size B thickness 8 mm	1-020108B	Tibial half-block for Total Knee Prosthesis - Size 6/7 Thickness 10mm LR/LM	1-0201246
Distal femoral block for Total Knee Prosthesis – Size C thickness 4 mm	1-020104C	Tibial half-block for Total Knee Prosthesis - Size 6/7 Thickness 15mm LR/LM	1-0201256
Distal femoral block for Total Knee Prosthesis – Size C thickness 8 mm	1-020108C		
Distal femoral block for Total Knee Prosthesis – Size D thickness 4 mm	1-020104D	Offset connector for Total Knee Prosthesis – 2 mm	1-0201302
Distal femoral block for Total Knee Prosthesis – Size D thickness 8 mm	1-020108D	Offset connector for Total Knee Prosthesis – 4 mm	1-0201304
		Offset connector for Total Knee Prosthesis – 6 mm	1-0201306
Posterior femoral block for Total Knee Prosthesis – Size A thickness 4 mm	1-020114A	Extension stem for Total Knee Prosthesis – Cemented - Ø10 length 75mm	1-0200710
Posterior femoral block for Total Knee Prosthesis – Size A thickness 8 mm	1-020118A	Extension stem for Total Knee Prosthesis – Cemented - Ø10 length 100mm	1-0200711
Posterior femoral block for Total Knee Prosthesis – Size B thickness 4 mm	1-020114B	Extension stem for Total Knee Prosthesis – Cemented - Ø10 length 150mm	1-0200712
Posterior femoral block for Total Knee Prosthesis – Size B thickness 8 mm	1-020118B	Extension stem for Total Knee Prosthesis – Cemented - Ø12 length 75mm	1-0200720
Posterior femoral block for Total Knee Prosthesis – Size C thickness 4 mm	1-020114C	Extension stem for Total Knee Prosthesis – Cemented - Ø12 length 100mm	1-0200721
Posterior femoral block for Total Knee Prosthesis – Size C thickness 8 mm	1-020118C	Extension stem for Total Knee Prosthesis – Cemented - Ø12 length 150mm	1-0200722
Posterior femoral block for Total Knee Prosthesis – Size D thickness 4 mm	1-020114D	Extension stem for Total Knee Prosthesis – Cemented - Ø12 length 200mm	1-0200723
Posterior femoral block for Total Knee Prosthesis – Size D thickness 8 mm	1-020118D	Extension stem for Total Knee Prosthesis – Cemented - Ø14 length 75mm	1-0200730
		Extension stem for Total Knee Prosthesis – Cemented - Ø14 length 100mm	1-0200731
		Extension stem for Total Knee Prosthesis – Cemented - Ø14 length 150mm	1-0200732
		Extension stem for Total Knee Prosthesis – Cemented - Ø14 length 200mm	1-0200733
SCORE® revision mobile bearing insert – Size A - Thickness 10 mm	1-020161A	Extension stem for Total Knee Prosthesis – Cemented - Ø14 length 200mm	1-0200734
SCORE® revision mobile bearing insert – Size A - Thickness 12 mm	1-020162A	Extension stem for Total Knee Prosthesis – Cemented - Ø16 length 100mm	1-0200742
SCORE® revision mobile bearing insert – Size A - Thickness 14 mm	1-020163A	Extension stem for Total Knee Prosthesis – Cemented - Ø16 length 150mm	1-0200743
SCORE® revision mobile bearing insert – Size A - Thickness 16 mm	1-020164A	Extension stem for Total Knee Prosthesis – Cemented - Ø16 length 200mm	1-0200751
SCORE® revision mobile bearing insert – Size A - Thickness 20 mm	1-020165A	Extension stem for Total Knee Prosthesis – Cemented - Ø18 length 100mm	1-0200752
SCORE® revision mobile bearing insert – Size B - Thickness 10 mm	1-020161B	Extension stem for Total Knee Prosthesis – Cemented - Ø18 length 150mm	1-0200753
SCORE® revision mobile bearing insert – Size B - Thickness 12 mm	1-020162B	Extension stem for Total Knee Prosthesis – Cemented - Ø18 length 200mm	1-0200761
SCORE® revision mobile bearing insert – Size B - Thickness 14 mm	1-020163B	Extension stem for Total Knee Prosthesis – Cemented - Ø20 length 100mm	1-0200762
SCORE® revision mobile bearing insert – Size B - Thickness 16 mm	1-020164B	Extension stem for Total Knee Prosthesis – Cemented - Ø20 length 150mm	1-0200763
SCORE® revision mobile bearing insert – Size B - Thickness 20 mm	1-020165B	Extension stem for Total Knee Prosthesis – Cemented - Ø20 length 200mm	1-0200764
SCORE® revision mobile bearing insert – Size C - Thickness 10 mm	1-020161C		
SCORE® revision mobile bearing insert – Size C - Thickness 12 mm	1-020162C		
SCORE® revision mobile bearing insert – Size C - Thickness 14 mm	1-020163C		
SCORE® revision mobile bearing insert – Size C - Thickness 16 mm	1-020164C		
SCORE® revision mobile bearing insert – Size C - Thickness 20 mm	1-020165C		
SCORE® revision mobile bearing insert – Size D - Thickness 10 mm	1-020161D		
SCORE® revision mobile bearing insert – Size D - Thickness 12 mm	1-020162D		
SCORE® revision mobile bearing insert – Size D - Thickness 14 mm	1-020163D		
SCORE® revision mobile bearing insert – Size D - Thickness 16 mm	1-020164D		
SCORE® revision mobile bearing insert – Size D - Thickness 20 mm	1-020165D		
Cemented resurfacing patellar implant - Ø 30 mm	1-0200830		
Cemented resurfacing patellar implant - Ø 33 mm	1-0200833		
Cemented resurfacing patellar implant - Ø 36 mm	1-0200836		
SCORE® tibial base plate for mobile bearing insert – Cemented – Size 1	1-0200501		
SCORE® tibial base plate for mobile bearing insert – Cemented – Size 2	1-0200502		
SCORE® tibial base plate for mobile bearing insert – Cemented – Size 3	1-0200503		
SCORE® tibial base plate for mobile bearing insert – Cemented – Size 4	1-0200504		
SCORE® tibial base plate for mobile bearing insert – Cemented – Size 5	1-0200505		
SCORE® tibial base plate for mobile bearing insert – Cemented – Size 6	1-0200506		
SCORE® tibial base plate for mobile bearing insert – Cemented – Size 7	1-0200507		

AMPLITUDE®

Customer Service France: Porte du Grand Lyon, 01700 Neyron, France - Phone: +33 (0)4 37 85 19 19 - Fax: +33 (0)4 37 85 19 18

Customer Service Export: 11, cours Jacques Offenbach, ZA Mozart 2, 26000 Valence, France - Phone: +33 (0)4 75 41 87 41 - Fax: +33 (0)4 75 41 87 42

Email: amplitude@amplitude-ortho.com. Internet: www.amplitude-ortho.com